

PT-305A

Automatic Ignition Butane Powered Pro-Torch

APPLICATIONS:

- Brazing
- Soldering
- Weed Burning
- Plumbing
- BBQ Grill Charcoal Starter
- Camping & Culinary
- Tool and Die Shops
- Thawing Frozen Parts
- Automotive and Truck Repair
- Industrial Maintenance

FEATURES:

- Powerful Wind-Resistant Flame
- High output flame for heavy jobs ideal for use in home, plumbing and workshop
- Combined gas flow control and activated push button for easier use
- Light weight design for versatile purpose use.
- Preheating System allows to be used safely at any angle.

Specification:

Length	140mm (5.50 in)
Height	70mm (2.75 in)
Width	39.5mm (1.55 in)
Weight (Without Canister)	110g
Fuel	Butane Canister
Flame Temperature	1300°C (2400°F)


The PT-305A provides the most powerful and stable butane flame available for demanding jobs where the highest BTU output is required.

Its precision orifice and controls offer the best there is in a high output butane tool.

PT-305A was designed with features to withstand the rigors of daily professional use.

PT-305A Instructions

- Connect PT-305A to Butane Canister by pushing down and turning clockwise (right) until it stops. Be sure to align butane output valve with torch input valve.
- To ignite, turn regulator knob counterclockwise (left) approximately 1/4 turn to start the gas flow and then push Ignition Button. You may have to push Ignition Button more than once depending on conditions.
- Rotate Regulator Knob to the LEFT for higher flame or to the RIGHT for lower flame
- Within 2 minutes of ignition, the flame may appear red. During this time the torch should only be used in an upright position. After 15 seconds of preheating the torch may be rotated to any angle.
- When replacing or disconnecting the butane canister, make sure that the Regulator Knob is tight in the OFF (right) position to avoid leaking.
- Disconnect torch from cylinder when not in use.
- If using the torch upside down, the flame may continue to burn for 10 seconds after turning off gas.

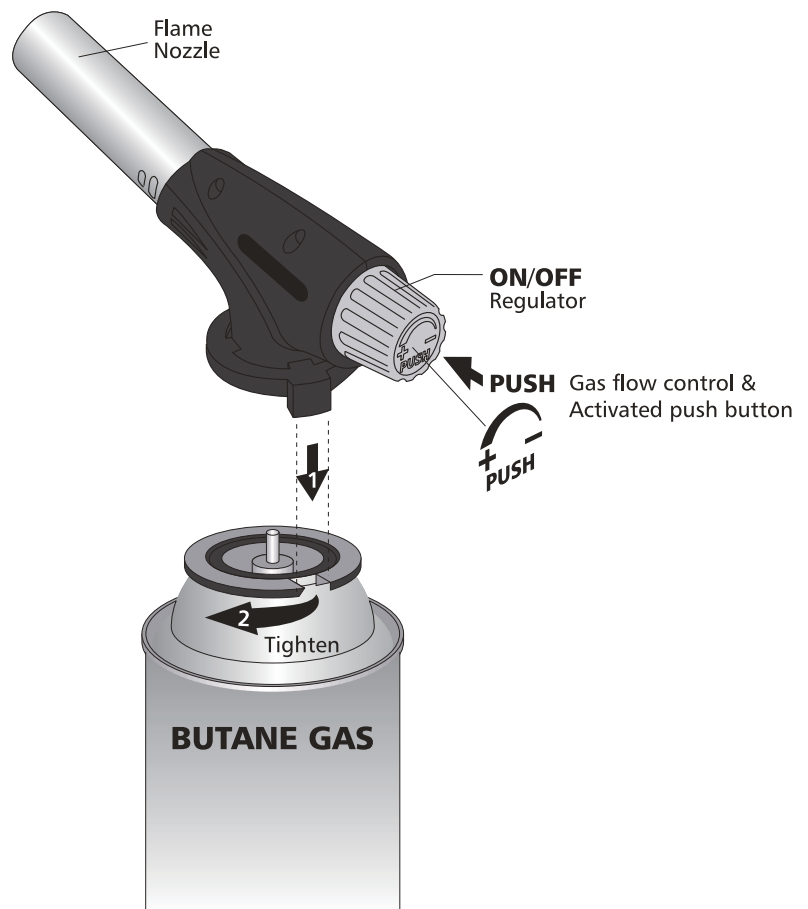

WARNINGS:

- Use only butane gas canister for Pro-Torch.
- Do not touch flame nozzle while in use until sufficient time has passed for cooling.
- Do not use at upside down position to avoid the spurted flame.
- Make sure that the gas flow is turned off when not in use.
- Always detach the Pro-Torch from butane canister when not in use.
- Do not immerse heated parts or items in water, allow cooling naturally.
- Keep away from eyes at all times.
- Keep this unit out of the reach of children.
- The flame of the pro-torch is nearly invisible in bright light or sunlight.